


- NOTES: UNLESS OTHERWISE SPECIFIED.
- Important Dim. A
 - Electrical Character: 100% Open/Short
Contact Resistance: 3 Ohms Max.
Hi-Pot: DC 300V/10ms Min
Insulation Resistance: 10M Ohms Min.

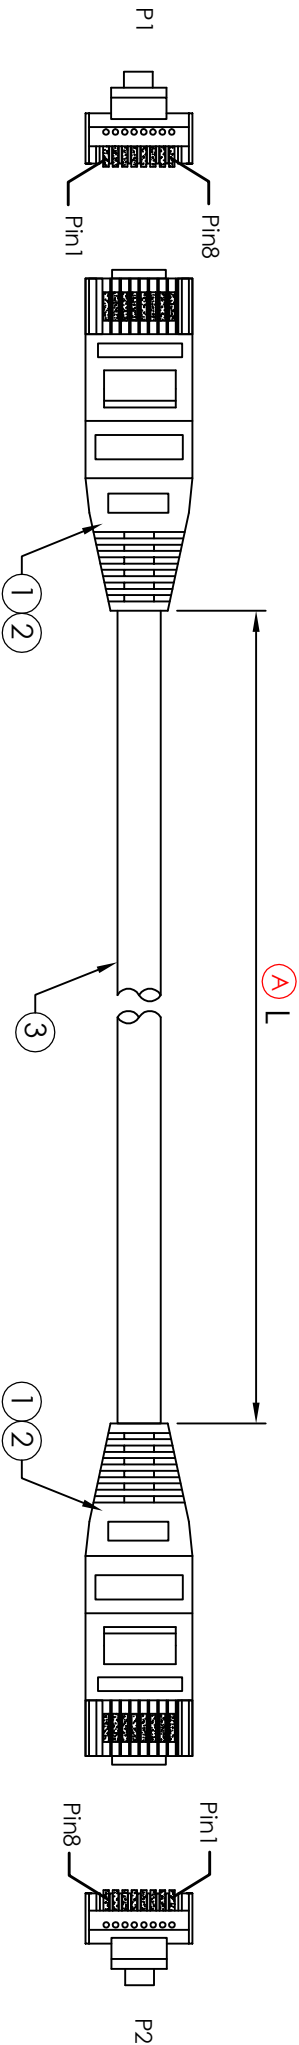

Bill Of Material

3	CXGS010	CABLE	CAT 6 28AWG*4P+AL+D Jacket Black PVC OD:4.0mm	mm	
2	KWGS228	Molding	Outer Over Moulding 50P PVC Color: Black	g	
1	KWGS221	CONN	PC Plug 8P8C Gold plated, Transparent.	PCS	2
No.	Vendor	NAME	Material Name and Name		

PART NO	Dim "L"
KC-820	2000mm±50mm
KC-822	3000mm±70mm
KC-824	5000mm±100mm
KC-826	10000mm±150mm

Wire Diagram	
P1	P2
1 White/Orange	1 Orange
2 Orange	2 White/Green
3 White/Green	3 Green
4 White/Blue	4 Blue
5 White/Blue	5 White/Brown
6 Blue	6 Brown
7 White/Brown	7 Brown
8 Brown	8 Brown

DESCRIPTION:
INDUSTRIAL ETHERNET CABLE (CAT-6) WITH
RJ-45 CONNECTORS

DRAWN:
DARSH

GENERAL TOLERANCE
LINEAR ANGLES

REV:
A/1

REV

DATE

01-05-2025

A4

SCALE:
1:XX



THIRD ANGLE PROJECTION

BALAJI MICROTECHNOLOGIES PVT. LTD.
www.balaji-microtechnologies.com

CHECKED:

APPROVAL:

HARSHIL

UNIT:

mm

SHEET:

1/1

4

