


NOTES: UNLESS OTHERWISE SPECIFIED.

- 1、Important Dim. (A)
2、Electrical Character: 100% Open/Short
Contact Resistance: 3 Ohms Max.
Hi-Pot: DC 300V/10ms Min
Insulation Resistance: 10M Ohms Min.

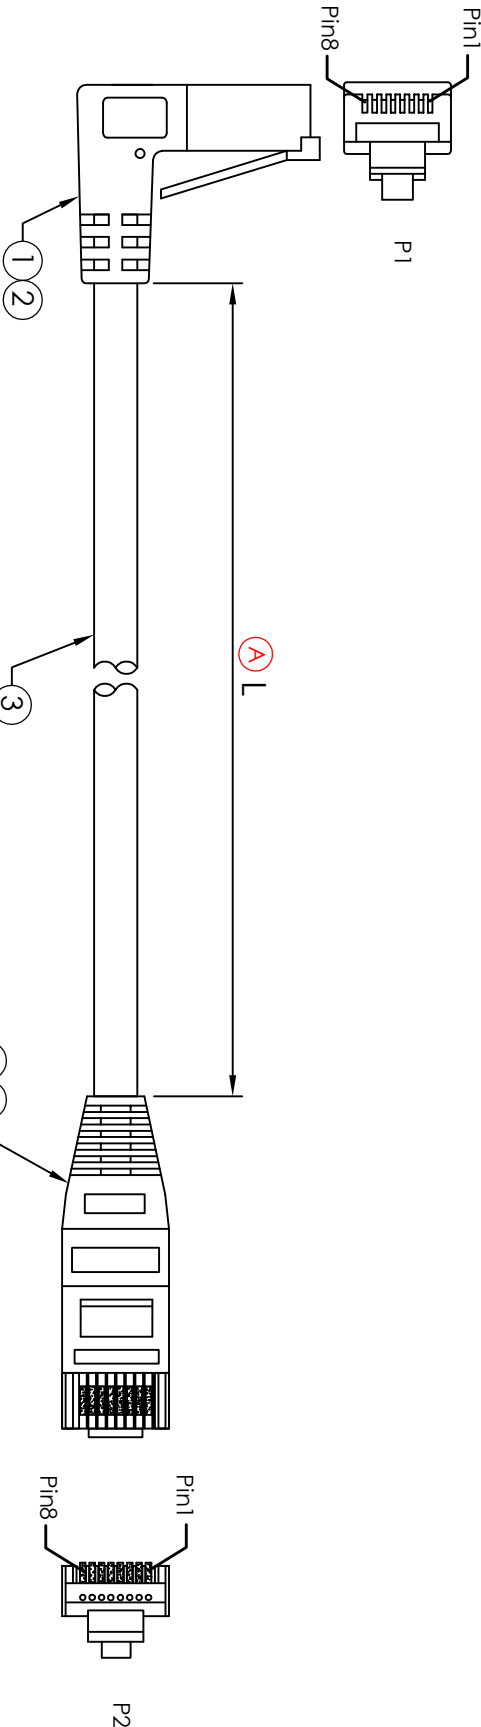

PART NO	Dim "L"
KC-830	2000mm±50mm
KC-832	3000mm±70mm
KC-834	5000mm±100mm
KC-836	10000mm±150mm

Bill Of Material

4	KWQS221	CONN	PC Plug 8P8C Gold plated,Transparent.	PCS	1
3	CXQS010	CABLE	CAT 6 28AWG*4P+AL+D Jacket Black PVC OD:4.0mm	mm	
2	KWQS228	Molding	Outer Over Moulding 50P PVC Color: Black	g	
1	KWQS221	CONN	PC Plug 8P8C Gold plated,Transparent With an iron shell.	PCS	1
No.	Vendor	NAME	Material Name and Name	Unit	Qty

Wire Diagram	
P1	P2
1 White/Orange	1
2 Orange	2
3 White/Green	3
6 Green	6
5 White/Blue	5
4 Blue	4
7 White/Brown	7
8 Brown	8

DRAWN: DARSH		REV: A/1		REV		DATE		01-05-2025	
--------------	--	----------	--	-----	--	------	--	------------	--

DESCRIPTION:
INDUSTRIAL ETHERNET CABLE (CAT-6), RJ-45
CONNECTORS, RIGHT ANGLE UP DIRECTION

A4

SCALE:
1:XX



BALAJI MICROTECHNOLOGIES PVT. LTD.
www.balaji-microtechnologies.com

APPROVAL: HARSHIL

GENERAL TOLERANCE		REV:	
LINEAR	ANGLES	A/1	REV
X.: ±0.50	X°: ±5.0°	1	
X.X: ±0.30	X.X°: ±3.0°	2	
X.XX: ±0.15	X.XX°: ±2.0°	3	
X.XXX: ±0.10	X.XXX°: ±1.0°	4	

