


NOTES: UNLESS OTHERWISE SPECIFIED.

- 1、 Important Dim. (A)
2、 Electrical Character: 100% Open/Short
Contact Resistance: 3 Ohms Max.
Hi-Pot: DC 300V/10ms Min
Insulation Resistance: 10M Ohms Min.

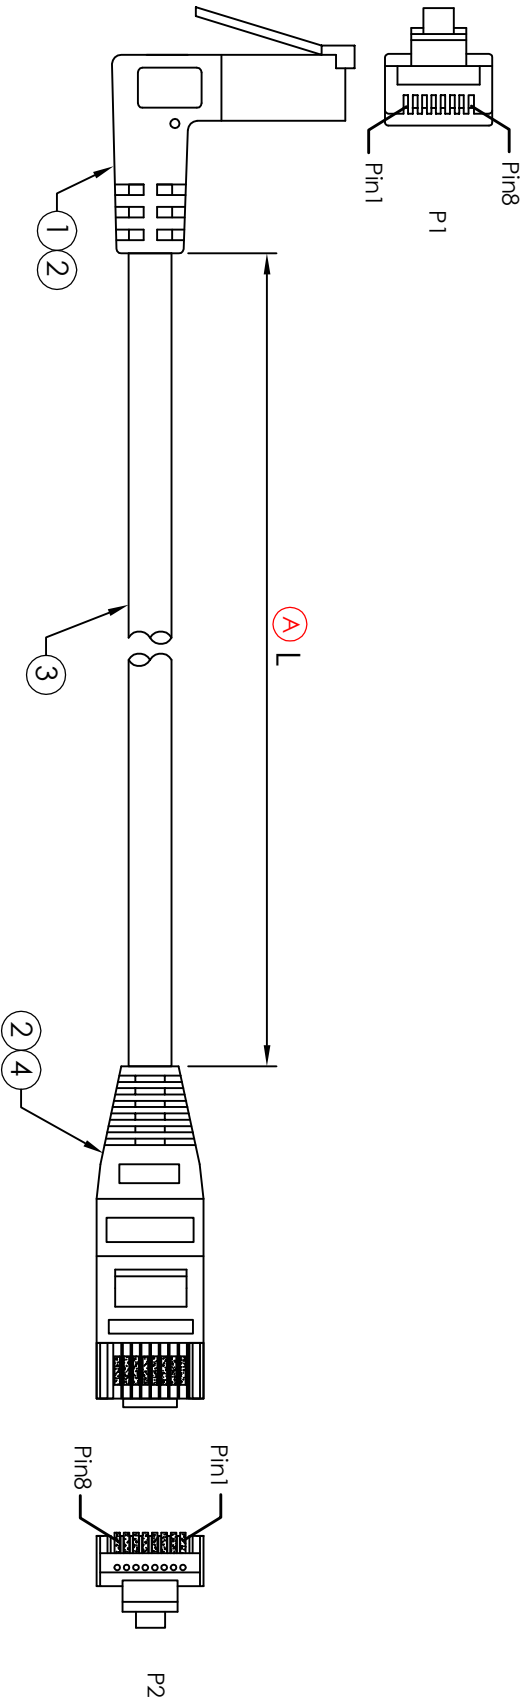

PART NO	Dim "L"
KC-840	2000mm±50mm
KC-842	3000mm±70mm
KC-844	5000mm±100mm
KC-846	10000mm±150mm

Bill Of Material

4	KWQS221	CONN	PC Plug 8P8C Gold plated, Transparent.	PCS	1
3	CXQS010	CABLE	CAT 6 28AWG*4P+AL+D Jacket Black PVC OD:4.0mm	mm	
2	KWQS228	Molding	Outer Over Moulding 50P PVC Color: Black	g	
1	KWQS221	CONN	PC Plug 8P8C Gold plated, Transparent With an iron shell.	PCS	1
No.	Vendor	NAME	Material Name and Name	Unit	Qty

Wire Diagram	
P1	P2
1 X X White/Orange	1 X X
2 X X Orange	2 X X
3 X X White/Green	3 X X
6 X X Green	6 X X
5 X X White/Blue	5 X X
4 X X Blue	4 X X
7 X X White/Brown	7 X X
8 X X Brown	8 X X

DRAWN: DARSH		GENERAL TOLERANCE		REV: A/1	REV	DATE	01-05-2025		
DESCRIPTION: INDUSTRIAL ETHERNET CABLE (CAT-6), RJ-45 CONNECTORS, RIGHT ANGLE DOWN DIRECTION		LINEAR		ANGLES	UNIT: mm	KRYPTEC®			
SCALE: 1:XX		X.: ±0.50		X°: ±5.0°	SHEET: 1/1				
		X.X: ±0.30		X.X°: ±3.0°					
THIRD ANGLE PROJECTION		X.XX: ±0.15		X.XX°: ±2.0°	3				
BALAJI MICROTECHNOLOGIES PVT. LTD. www.balaji-microtechnologies.com		X.XXX: ±0.10		X.XXX°: ±1.0°	4				