


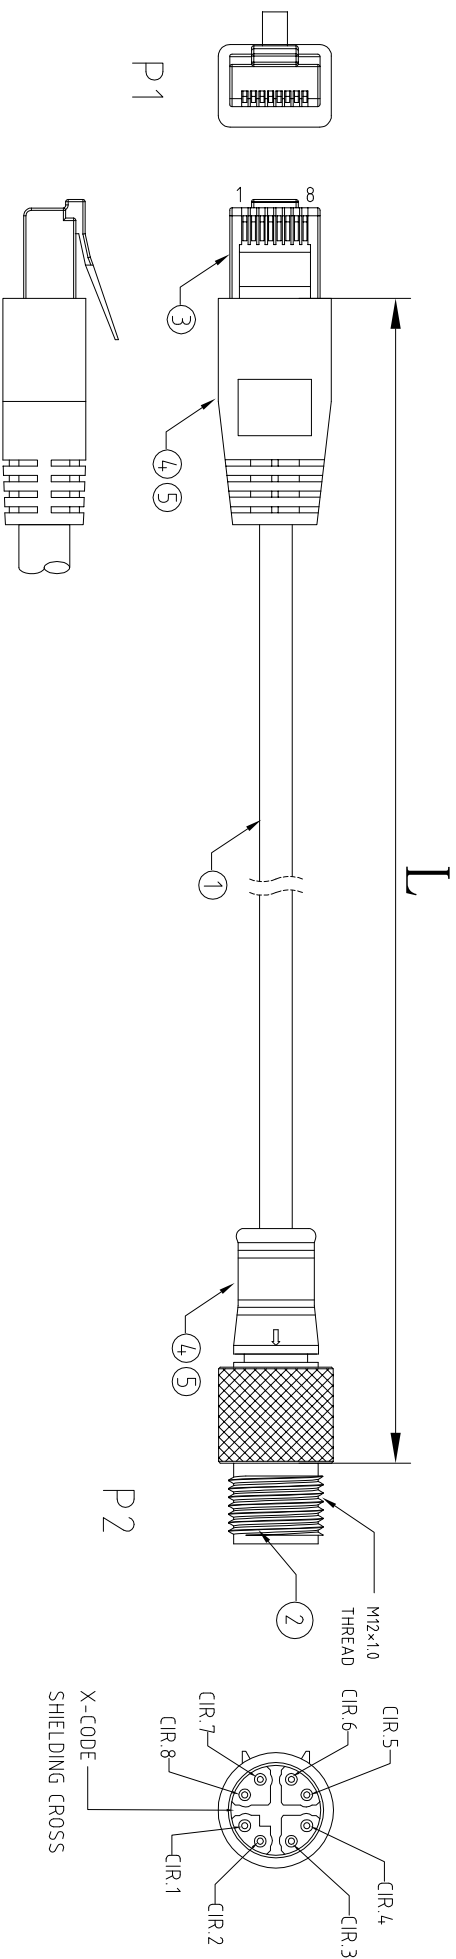

PIN ASSIGNMENT

P1	P2	WIRE COLOR
1	6	WHITE ORANGE
2	5	ORANGE
3	4	WHITE GREEN
4	7	BLUE
5	8	WHITE BLUE
6	3	GREEN
7	2	WHITE BROWN
8	1	BROWN
SHELL		SHELL

Length and Part number:

No	Part No:	Length (MM)
1	KC-916	2000±30
2	KC-918	3000±35
3	KC-920	5000±50

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.



QUALITY SYMBOLS
□ :
CRITICAL
∇ :
ZERO DEFECT S.P.C

Tolerance
X. ±0.60
.X ±0.40
.xx ±0.25

REV: A
SCALE: N:1
DATE: 01-05-2025
HARSHIL

BALAJI MICROT TECHNOLOGIES PVT. LTD. (BMT)
www.balaji-microtechnologies.com