



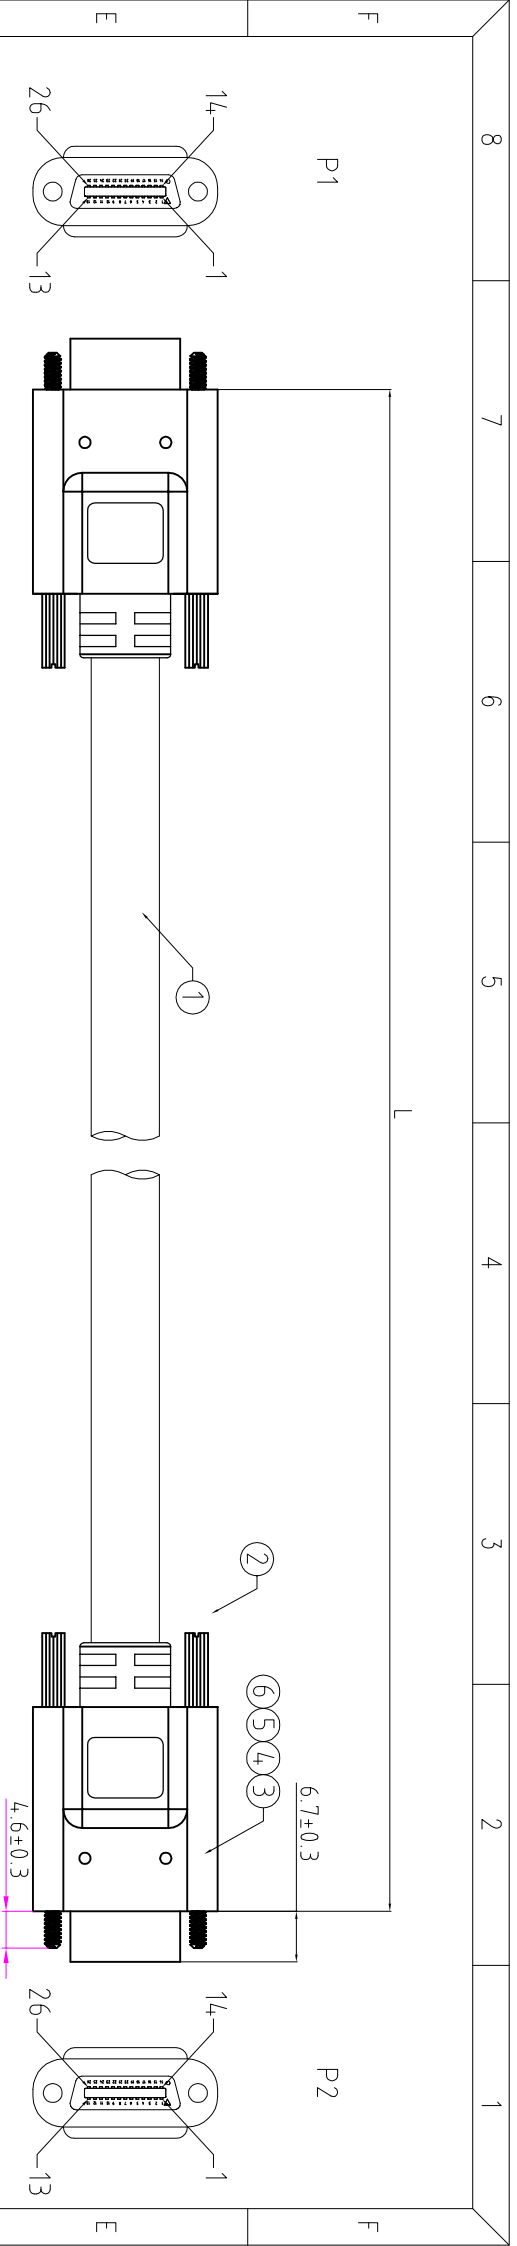

Wire Assignment:

| Length and Part number: |          |            |
|-------------------------|----------|------------|
| No.                     | Part No: | LENGTH(MM) |
| 1                       | KC-934   | 2000±30    |
| 2                       | KC-936   | 3000±50    |
| 3                       | KC-940   | 5000±50    |

- NOTES:
1. OPEN/SHORT/INTERMITTENCE:100% TEST
  2. DIELECTRIC WITHSTAND:AC100V/1MIN.
  3. INSULATION RESISTANCE:DC 100V/10MΩ (MIN)
  4. CONDUCTIVE RESISTANCE:See TABLE A

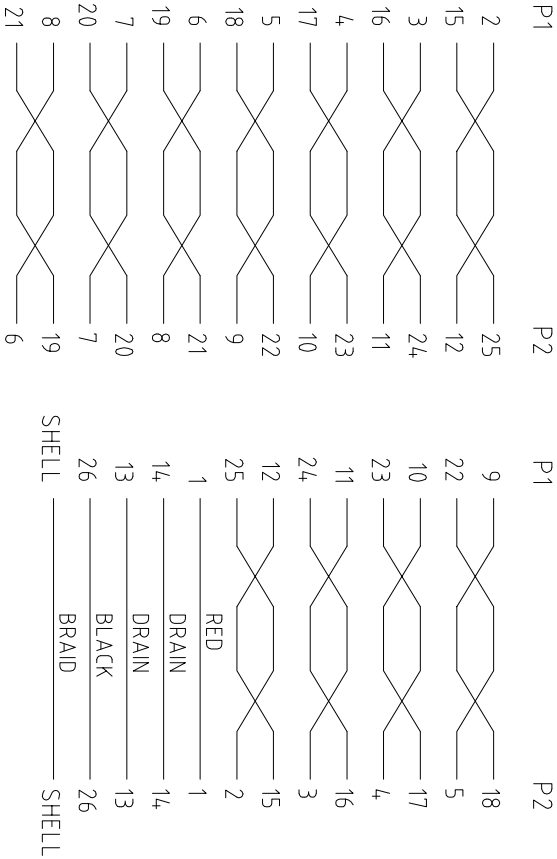

| ITEM | MATERIAL    | DESCRIPTION                                                        | Q'TY | UNIT |
|------|-------------|--------------------------------------------------------------------|------|------|
| ①    | CABLE       | UL 20276 (28AWG+AL)X1TP+24AWG×2C+D×2C+AB OD:9.0MM Jacket:Black PVC | 1    | PCS  |
| ②    | CONN        | SDR 26P Male PIN:5U" Insulation:Black Shell:NI                     | 2    | PCS  |
| ③    | Screw       | M2.0 Thumbscrew L=4.0.5MM                                          | 4    | PCS  |
| ④    | Inner Mold  | LD-PE                                                              | N/A  | KG   |
| ⑤    | Over Mold   | BLACK PVC                                                          | N/A  | KG   |
| ⑥    | Copper Foil | Copper Foil                                                        | N/A  | MM   |

| PRODUCT |  | CAMERALINK CABLE – SDR-26P MALE TO SDR-26P MALE |  |  |  |
|---------|--|-------------------------------------------------|--|--|--|
|---------|--|-------------------------------------------------|--|--|--|

| SIDE | A |  | QUALITY SYMBOLS            |                                       |
|------|---|----------------------------------------------------------------------------------|----------------------------|---------------------------------------|
|      |   |                                                                                  | <input type="checkbox"/> : | <input checked="" type="checkbox"/> : |
|      |   |                                                                                  | DARSH                      | MAJOR                                 |
|      |   |                                                                                  | APPROVER                   | ZERO DEFECT S.P.C                     |

| Tolerance |       | REV: |       |    |        | SCALE: |  | DATE:      |  | HARSHIL |  |
|-----------|-------|------|-------|----|--------|--------|--|------------|--|---------|--|
| x.        | ±0.60 | A    | UNIT: | mm | DRW BY | N:1    |  | 01-05-2025 |  |         |  |
| .x        | ±0.40 |      |       |    |        |        |  |            |  |         |  |
| .xx       | ±0.25 |      |       |    |        |        |  |            |  |         |  |

BALAJI MICROTECHNOLOGIES PVT. LTD. (BMT)  
www.balaji-microtechnologies.com