


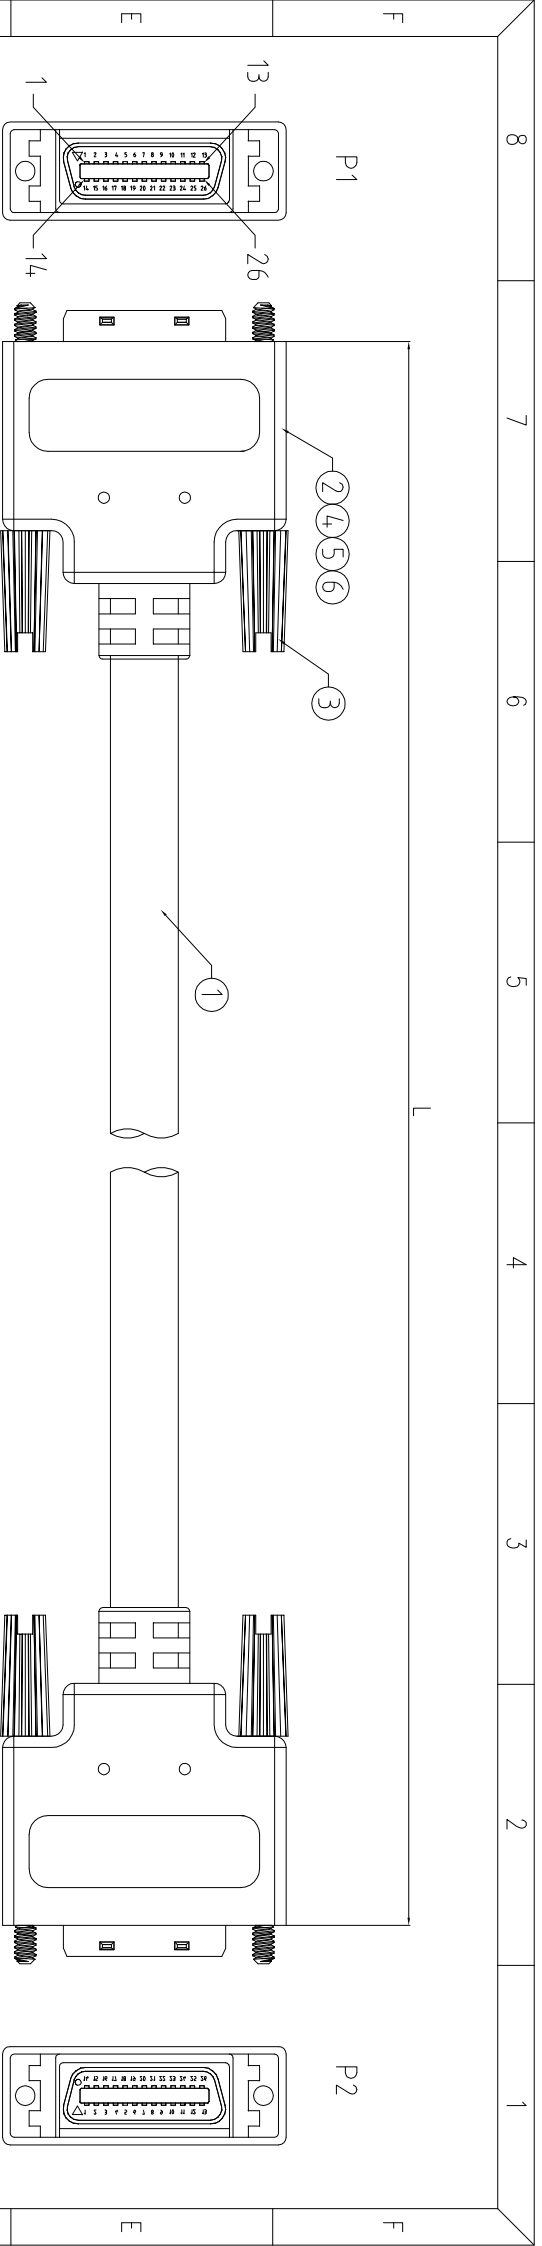

Wire Assignment:

Length and Part number:		NOTES:	
No.	Part No:	1. OPEN/SHORT/INTERMITTENCE:100% TEST	
1	KC-948	2. DIELECTRIC WITHSTAND:AC100V/1MIN.	
2	KC-950	3. INSULATION RESISTANCE:DC 100V/10MΩ (MIN)	
3	KC-952	4. CONDUCTIVE RESISTANCE:See TABLE A	

ITEM	MATERIAL	DESCRIPTION	Q'TY	UNIT
①	CABLE	UL 20276 (28AWG+AL)X11P+24AWG×2C+D×2C+AB OD:9.0MM Jacket:Black PVC	1	PCS
②	CONN	MDR 26P Male PIN:5U" Insulation:Black Shell:NI	2	PCS
③	Screw	#4-40 Thumbscrew L=44MM	4	PCS
④	Inner Mold	LD-PE	N/A	KG
⑤	Over Mold	BLACK PVC	N/A	KG
⑥	Copper Foil	Copper Foil	N/A	MM

PRODUCT:		CAMERALINK CABLE – MDR-26-PIN MALE TO MDR-26-PIN MALE CABLE	
Tolerance		REV:	A
X. ±0.60		SCALE:	N:1
X. ±0.40		DATE:	01-05-2025
XX ±0.25		HARSHIL	
QUALITY SYMBOLS		DRW BY	
□: CRITICAL			
☑: MAJOR			
▽: ZERO DEFECT			
S.P.C			



BALAJI MICROTECHNOLOGIES PVT. LTD. (BMT)
www.balaji-microtechnologies.com