




## 25W Single Output Switching Power Supply

# RS-25 series

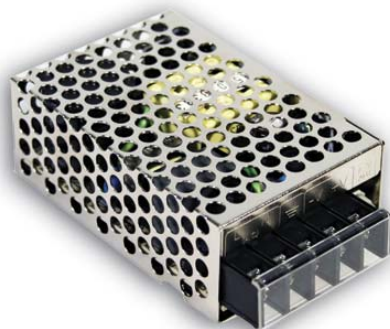

### ■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- All using 105°C long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- Withstand 5G vibration test
- No load power consumption<0.5W
- High efficiency, long life and high reliability
- 3 years warranty




### SPECIFICATION

| MODEL                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | RS-25-3.3                                                                                                               | RS-25-5      | RS-25-12     | RS-25-15       | RS-25-24     | RS-25-48     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------|--------------|----------------|--------------|--------------|
| OUTPUT                   | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 3.3V                                                                                                                    | 5V           | 12V          | 15V            | 24V          | 48V          |
|                          | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 6A                                                                                                                      | 5A           | 2.1A         | 1.7A           | 1.1A         | 0.57A        |
|                          | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0 ~ 6A                                                                                                                  | 0 ~ 5A       | 0 ~ 2.1A     | 0 ~ 1.7A       | 0 ~ 1.1A     | 0 ~ 0.57A    |
|                          | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 19.8W                                                                                                                   | 25W          | 25.2W        | 25.5W          | 26.4W        | 27.36W       |
|                          | RIPPLE & NOISE (max.) <small>Note.2</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 80mVp-p                                                                                                                 | 80mVp-p      | 120mVp-p     | 120mVp-p       | 120mVp-p     | 200mVp-p     |
|                          | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 2.85 ~ 3.6V                                                                                                             | 4.75 ~ 5.5V  | 10.8 ~ 13.2V | 13.5 ~ 16.5V   | 22 ~ 27.6V   | 42 ~ 54V     |
|                          | VOLTAGE TOLERANCE <small>Note.3</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ± 3.0%                                                                                                                  | ± 2.0%       | ± 1.0%       | ± 1.0%         | ± 1.0%       | ± 1.0%       |
|                          | LINE REGULATION <small>Note.4</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ± 0.5%                                                                                                                  | ± 0.5%       | ± 0.5%       | ± 0.5%         | ± 0.5%       | ± 0.5%       |
|                          | LOAD REGULATION <small>Note.5</small>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ± 2.0%                                                                                                                  | ± 1.0%       | ± 0.5%       | ± 0.5%         | ± 0.5%       | ± 0.5%       |
|                          | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1800ms, 23ms/230VAC      4000ms, 30ms/115VAC at full load                                                               |              |              |                |              |              |
| HOLD UP TIME (Typ.)      | 80ms/230VAC      14ms/115VAC at full load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                         |              |              |                |              |              |
| INPUT                    | VOLTAGE RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 88 ~ 264VAC      125 ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage)                                         |              |              |                |              |              |
|                          | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 47 ~ 63Hz                                                                                                               |              |              |                |              |              |
|                          | EFFICIENCY(Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 73.5%                                                                                                                   | 78.5%        | 81.5%        | 83.5%          | 86%          | 85%          |
|                          | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.7A/115VAC      0.4A/230VAC                                                                                            |              |              |                |              |              |
|                          | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | COLD START 45A/230VAC                                                                                                   |              |              |                |              |              |
|                          | LEAKAGE CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <2mA / 240VAC                                                                                                           |              |              |                |              |              |
| PROTECTION               | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 110 ~ 180% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed |              |              |                |              |              |
|                          | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 3.8 ~ 4.45V                                                                                                             | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V | 55.2 ~ 64.8V |
| ENVIRONMENT              | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -20 ~ +70℃ (Refer to "Derating Curve")                                                                                  |              |              |                |              |              |
|                          | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 20 ~ 90% RH non-condensing                                                                                              |              |              |                |              |              |
|                          | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | -40 ~ +85℃, 10 ~ 95% RH                                                                                                 |              |              |                |              |              |
|                          | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ± 0.03%/℃ (0 ~ 50℃)                                                                                                     |              |              |                |              |              |
|                          | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes                                                 |              |              |                |              |              |
| SAFETY & EMC<br>(Note 6) | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UL62368-1, TUV EN62368-1 , EAC TP TC 004, CCC GB4943.1, BSMI CNS14336-1 approved                                        |              |              |                |              |              |
|                          | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | I/P-O/P:3KVAC    I/P-FG:2KVAC    O/P-FG:0.5KVAC                                                                         |              |              |                |              |              |
|                          | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25℃ / 70% RH                                                               |              |              |                |              |              |
|                          | EMC EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance to EN55032 (CISPR32) Class B, EN61000-3-2,-3,GB9254 class B,GB17625.1, EAC TP TC 020, CNS13438 Class B       |              |              |                |              |              |
|                          | EMC IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A, EAC TP TC 020                                 |              |              |                |              |              |
| OTHERS                   | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 309.7Khrs min.    MIL-HDBK-217F (25℃)                                                                                   |              |              |                |              |              |
|                          | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 78*51*28mm (L*W*H)                                                                                                      |              |              |                |              |              |
|                          | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 0.2Kg; 60pcs/13Kg/0.46CUFT                                                                                              |              |              |                |              |              |
| NOTE                     | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. Line regulation is measured from low line to high line at rated load.<br>5. Load regulation is measured from 0% to 100% rated load.<br>6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="http://www.meanwell.com">http://www.meanwell.com</a> )<br>7. The ambient temperature derating of 3.5℃/1000m with fanless models and of 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft) |                                                                                                                         |              |              |                |              |              |

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. Line regulation is measured from low line to high line at rated load.
5. Load regulation is measured from 0% to 100% rated load.
6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm\*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <http://www.meanwell.com>)
7. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).

### Mechanical Specification

Case No.931A Unit:mm

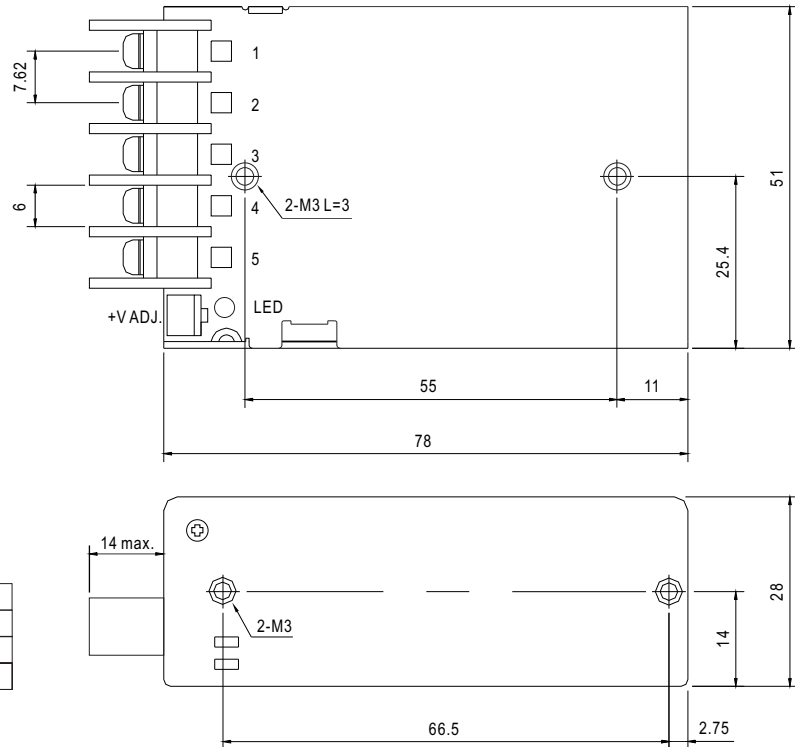


Terminal Pin No. Assignment


| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4       | DC OUTPUT -V |
| 2       | AC/N       | 5       | DC OUTPUT +V |
| 3       | FG $\perp$ |         |              |

### Block Diagram

fosc : 60KHz

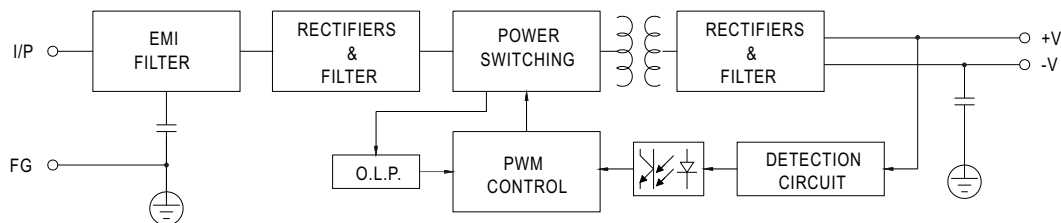

### Derating Curve

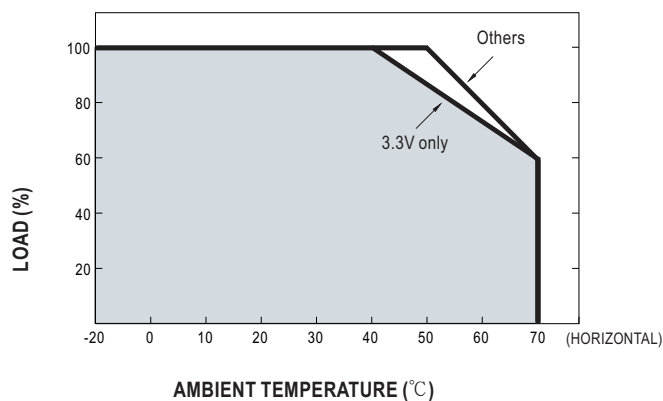

### Output Derating VS Input Voltage

