
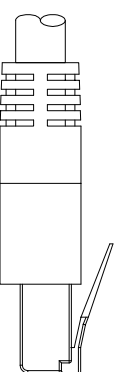


L= MM

11.6±0.3

P1

P2

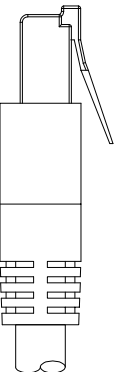

Length and Part number:

No	Part No:	Length (MM)
1	KC-902	2000±30
2	KC-904	3000±35
3	KC-906	5000±50
4	KC-908	10000±150

WIRE CONNECTION

COLOR (568B)	P1	PAIRS	P2
WHITE/ORANGE	1	_____	1
ORANGE	2	_____	2
WHITE/GREEN	3	_____	3
BLUE	4	_____	4
WHITE/BLUE	5	_____	5
GREEN	6	_____	6
WHITE/BROWN	7	_____	7
BROWN	8	_____	8

SHELL _____ SHELL _____

- CAT-8 40Gbps
- 4P*26AWG(1*0.4BC) (S/FTP) OD:6.2±0.20mm
- Bandwidth 2000 Mhz
- Gold Plated RJ45 Connector Au 50u”
- Weatherproof S/FTP UV Resistant
- Fluke Pass
- Black Color

PRODUCT INDUSTRIAL ETHERNET CABLE (CAT-8) WITH RJ-45 CONNECTORS.

REV:	A	UNIT:	mm	DRW BY	
SCALE:	N:1	DATE:	01-05-2025	HARSHIL	

BALAJI MICROTECHNOLOGIES PVT. LTD. (BMT)
www.balaji-microtechnologies.com



QUALITY SYMBOLS	□ :	☒ :
CRITICAL	MAJOR	
APPROVER	ZERO DEFECT	S.P.C

Tolerance	x. ±0.60
x. ±0.40	
.xx ±0.25	

